



## ***HLTQ series***

Industrial PC for shop floor applications



# *Smart Connected Assembly*

Start Up

Traceability

Production


## **SMART CONNECTED ASSEMBLY**

Optimization

Maintenance

Quality Assurance

Error Proofing

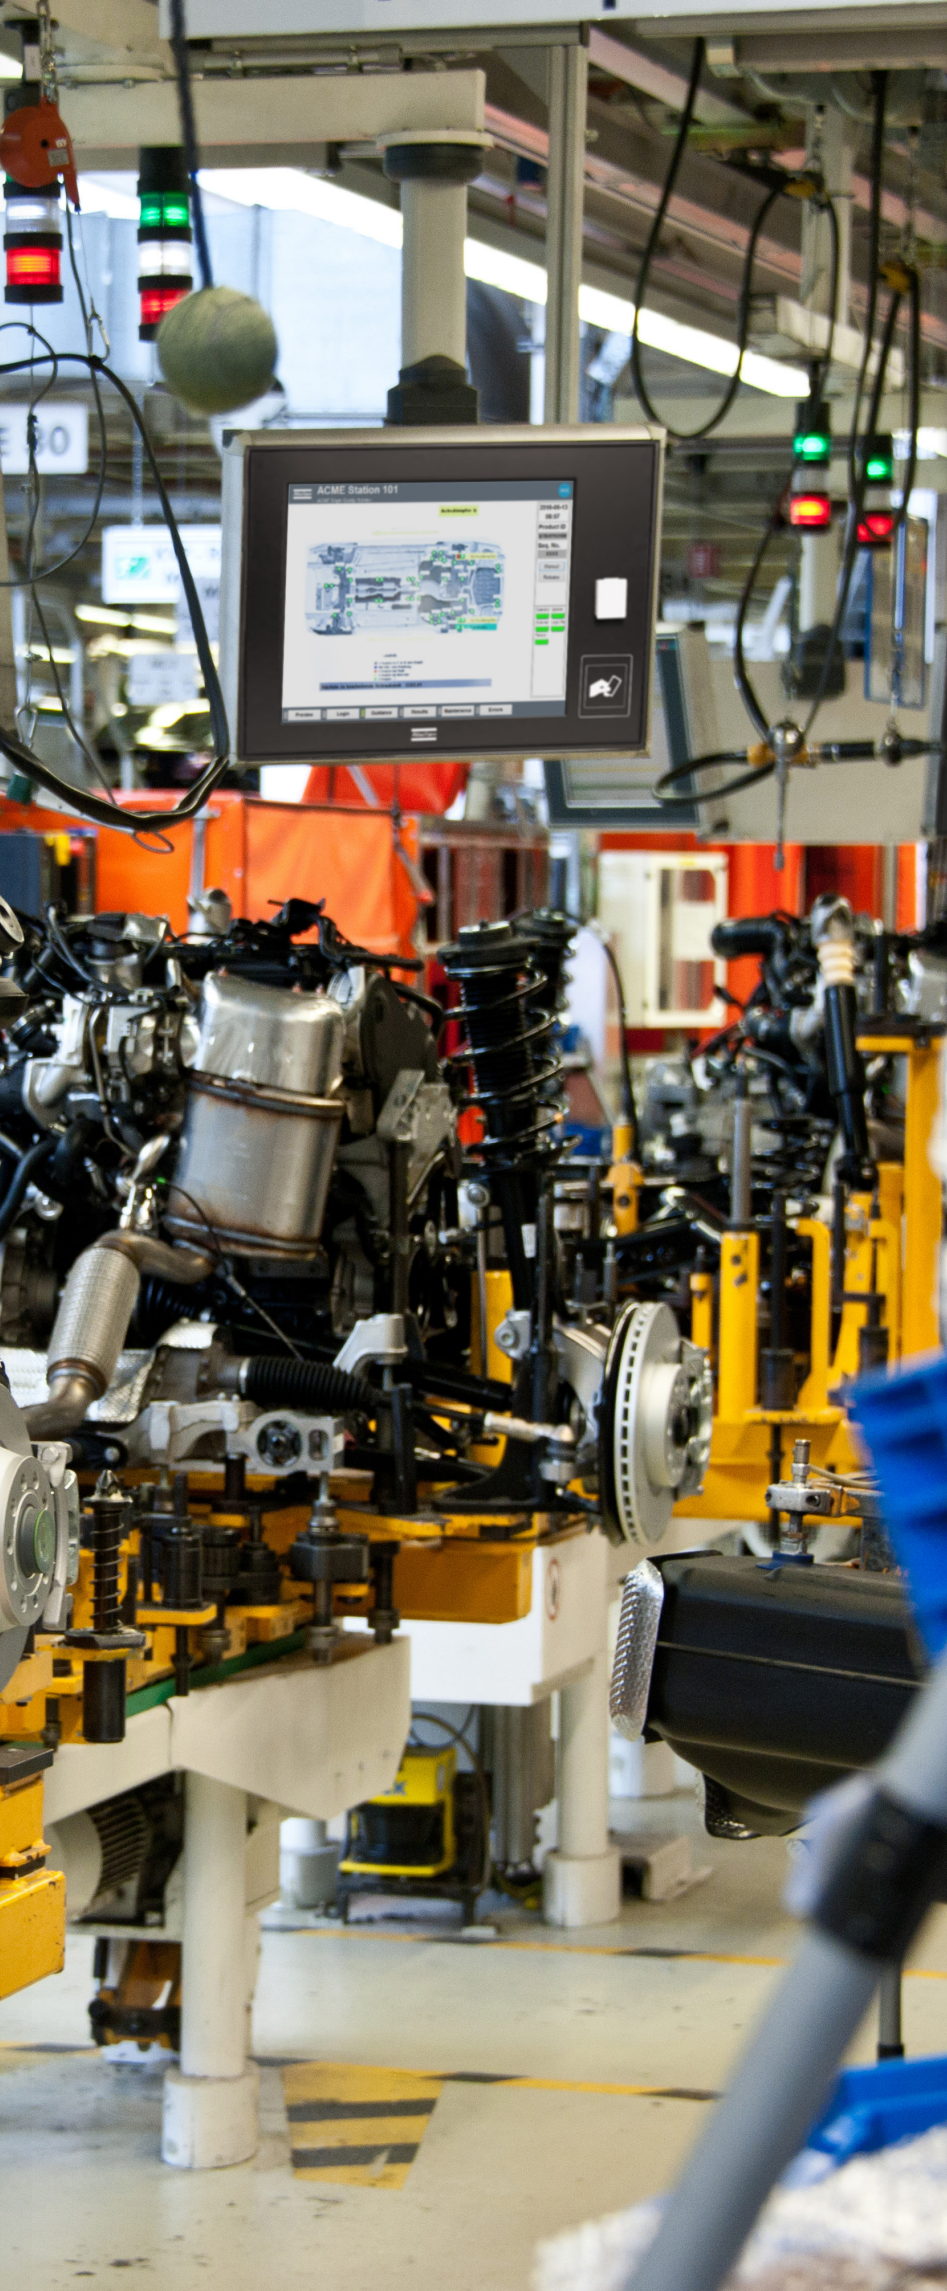

**Atlas Copco is a total solutions provider.**

The advent of Industry 4.0 brings rapid changes and new challenges.

With our Smart Connected Assembly you maintain quality control in complex production systems and increase uptime in production critical operations.

To help facilitating your zero defect strategy the Industrial PC "HLTQ" complements our error proofing product portfolio for shop floor applications.


**Three core values with the HLTQ series**



Human Interaction



Improved Productivity



Increased Uptime





## ***The solution for visualization and control on the shop floor***

With their robust design and high-performance components the HLTO (Hard Line Terminal) series are state-of-the-art devices for your industrial purposes.


You can choose between 6 standard models that are pre-configured and available off-the-shelf, or a customized version which can be configured individually based on available options.



In combination with the Atlas Copco Single Quality Solution software the HLTO series visualizes and controls your entire assembly process on the shop floor.



# Versatile Technology

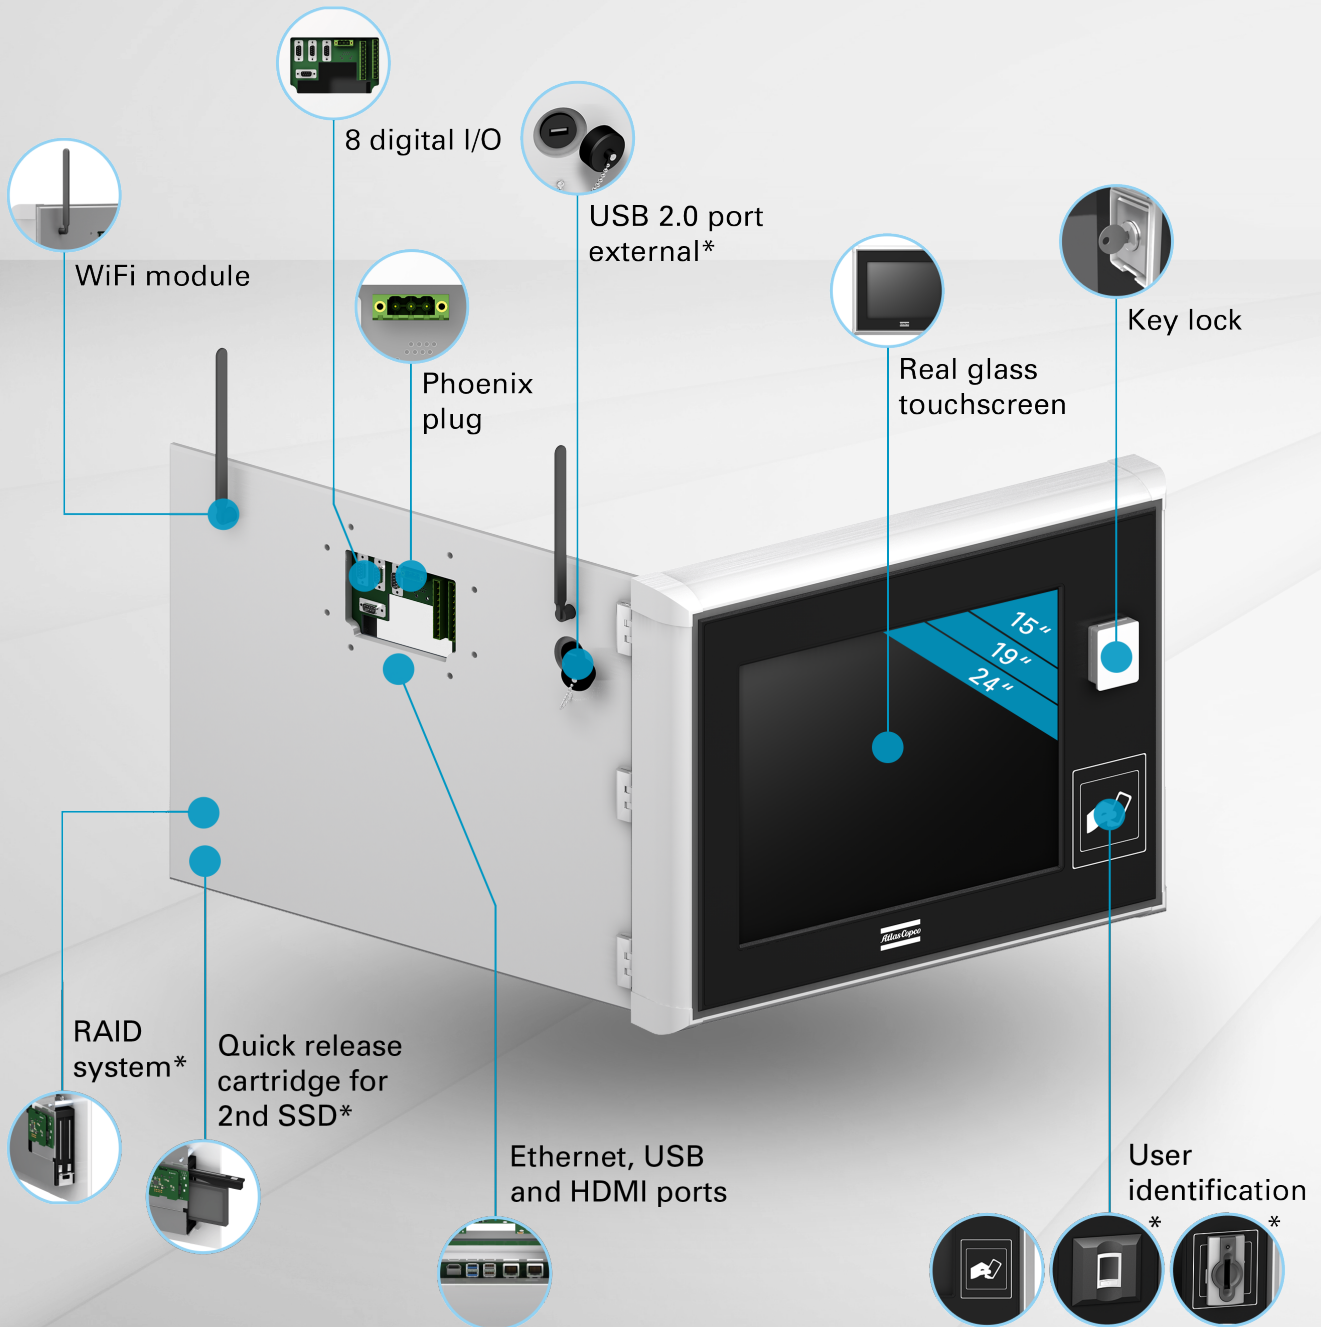

\*option feature



## Sustainable Performance

The integrated AMD Quad Core processor with 2.4 GHz, up to 8 GB RAM and the possibility/option to retrofit a second Solid State Disk (SSD) drive constitute high fault tolerance on the one hand and high performance on the other hand.

The utilization of SSD drives in combination with the HLTO's LED technology and passive cooling concept makes the HLTO series an uncompromising energy efficient device.

## Unconditional Operability

Shock resistant components and the resistive glass touchscreen, which is operable with gloves, make the HLTO series a reliable and user-friendly device - even in a tough work environment.



## ***Uncompromising Connectivity***

With its multiple interfaces like Ethernet, WiFi, USB, HDMI or digital I/O and the connectivity to many devices such as tool controllers, scanners, stack lights or Pick by Light shelves the HLTO series can be seen as the center of an entire assembly station.



## ***Efficient Service***

Due to its plug & play character with the fast lock flange mounting and unmounting is quick and easy. Even in assembly stations that are hard to access service and maintenance personnel can still perform ergonomically.







# Technical Data

		Standard (15"   19"   24")	Configurable (15"   19"   24")
<b>CPU Type</b>	AMD® G-Series GX-424CA (Quad-Core 2.4 GHz), L2 2 MB, 25 W	•	•
<b>Motherboard</b>	NANO-KBN-i1-4241-R10	•	•
<b>RAM</b>	4 GB, DDR3, FSB 1600/1333 MHz	–	•
	8 GB, DDR3, FSB 1600/1333 MHz	•	optional
<b>Mass storage</b>	64 GB SSD, 2.5", SATA 3 interface, quick release cartridge	–	•
	128 GB SSD, 2.5", SATA 3 interface, quick release cartridge	•	optional
	256 GB SSD, 2.5", SATA 3 interface, quick release cartridge	–	optional
<b>Ports</b>	1x LAN Gigabit Intel i210-AT, with NCSI support 1x LAN Gigabit Intel i211-AT 2x USB 3.0, 2x USB 2.0 (internal accessible) 5x COM RS232, each with 5V configurable 1x RS232 / RS422 / RS485, each with 5V configurable Digital Input: 8 x 24VDC Digital Output: 8 x 24VDC, 100mA (single) or 400mA (complete) loadable 1x extension connector (RJ45) - 7 extension modules connectable 1x miniPCI express slot	•	•
	1x USB 2.0 (external accessible)	–	optional
<b>Ext. Monitor port</b>	1x HDMI 1.4a	•	•
<b>Display</b>	15": LED TFT, 4:3, 1024 x 768 pixel, brightness ≤ 400 cd/m <sup>2</sup>	•	•
	19": LED TFT, 5:4, 1280 x 1024 pixel, brightness ≥ 350 cd/m <sup>2</sup>	•	•
	24": LED TFT, 16:9, 1920 x 1080 pixel, brightness ≤ 300 cd/m <sup>2</sup>	•	•
<b>Touch</b>	glass, resistive	•	•
<b>RAID system</b>	RAID1 configuration (mirrored system, quick release cartridge for two SSD's and second 2.5" SSD, min. 64 GB necessary, needs miniPCI express slot)	– <sup>(1)</sup>	optional <sup>(2)</sup>
<b>WiFi</b>	WLAN Client Interface (802.11 a/b/g/n)	– / •	optional
<b>User identification</b>	RFID reader 13,56 MHz and 125 kHz	•	•
	LEGIC reader with ID badge holder	–	optional
	Fingerprint reader	–	optional
	Mifare reader	–	optional
	Euchner reader	–	optional
	Euchner electronic key system EKS (available on demand)	–	optional
<b>Lock</b>	Rittal standard	•	•
<b>Power supply</b>	100 – 240 VAC (Phoenix plug) No powercable is included in delivery!	•	•
<b>Power rating</b>	max. 70W	•	•
<b>Current rating</b>	max. 1A	•	•
<b>Mounting</b>	Adapter console Rittal CP 60 (holder for mounting bracket included)	•	•
<b>Housing</b>	Aluminum	•	•
<b>Protection class</b>	HLT15Q & HLT19Q -> IP44; HLT24Q -> IP42 (regarding EN 60529)	•	•
<b>Operating system</b>	Windows Embedded Standard 7: 64 Bit	•	optional
	Windows 7 Pro: 32 Bit / 64 Bit	–	optional
	Windows Embedded Standard 7: 32 Bit / 64 Bit	–	optional
<b>Size / Weight</b>	15": 484 x 368 x 70 mm / 12 kg / 26,5 lb (without options, weight of configured options to be added)	•	•
	19": 583 x 434 x 70 mm / 15 kg / 33,0 lb (without options, weight of configured options to be added)	•	•
	24": 732 x 434 x 70 mm / 21 kg / 46,3 lb (without options, weight of configured options to be added)	•	•

Type	Model	Ordering No.
Standard	HLT15Q	8434 2300 00
Standard	HLT15Q-W <sup>(3)</sup>	8434 2300 10
Standard	HLT19Q	8434 2300 20
Standard	HLT19Q-W <sup>(3)</sup>	8434 2300 30
Standard	HLT24Q	8434 2300 40
Standard	HLT24Q-W <sup>(3)</sup>	8434 2300 50

Type	Model
Configurable	HLT15Q
Configurable	HLT19Q
Configurable	HLT24Q

**i** For individual configurations please contact your local sales representative

<sup>(1)</sup> Standard RAID upgrade kit is with 128 GB SSD size only  
<sup>(2)</sup> RAID upgrade kit is with the customer specified SSD size  
<sup>(3)</sup> Available with WiFi

# Single Quality Solution

Error proofing software



Entry level standalone solution



Set of standard functionalities



Plug & Play



Easy to configure



As a complementary product to the HLTQ series the Single Quality Solution is a comprehensive solution that drives quality, process reliability and transparency, as well as product safety at your assembly stations. It guides your tool operators through the assembly process leaving no room for error or oversight.

The Single Quality Solution manages the assembly process of many different variations of your products and is ideally suited for sub assembly stations, backup stations, and repair areas.



Type	Ordering No.
License for 1 station	8434 2380 00



## ***Committed to sustainable productivity***

We stand by our responsibilities towards our customers,  
towards the environment and the people around us.  
We make performance stand the test of time.  
This is what we call — Sustainable Productivity.

[www.atlascopco.com](http://www.atlascopco.com)

**Atlas Copco**